




24 in. fixture shown in Black with Black receptacles
APT24-4B-P-BK

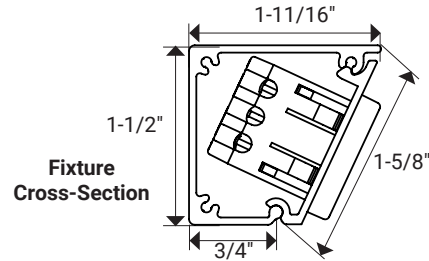

SINGLE RECEPTACLE ANGLE POWER STRIP

PART NUMBER	DESCRIPTION	LENGTH	NUMBER OF RECEPTACLES	RECEPTACLE COLOR	FINISH OPTION
APT9-2Color-P-Finish- <i>*Position</i>	9" APT Series Angle Power Strip with 1 Single Receptacle.	9"	2	B, G, W	BK, BZ, SN, WT
APT12-2Color-P-Finish- <i>*Position</i>	12" APT Series Angle Power Strip with 2 Single Receptacle.	12"	2	B, G, W	BK, BZ, SN, WT
APT18-3Color-P-Finish- <i>*Position</i>	18" APT Series Angle Power Strip with 3 Single Receptacles.	18"	3	B, G, W	BK, BZ, SN, WT
APT24-4Color-P-Finish	24" APT Series Angle Power Strip with 4 Single Receptacles.	24"	4	B, G, W	BK, BZ, SN, WT
APT30-4Color-P-Finish	30" APT Series Angle Power Strip with 4 Single Receptacles.	30"	4	B, G, W	BK, BZ, SN, WT
APT36-4Color-P-Finish	36" APT Series Angle Power Strip with 4 Single Receptacles.	36"	4	B, G, W	BK, BZ, SN, WT
APT42-5Color-P-Finish	42" APT Series Angle Power Strip with 5 Single Receptacles.	42"	5	B, G, W	BK, BZ, SN, WT
APT48-5Color-P-Finish	48" APT Series Angle Power Strip with 5 Single Receptacles.	48"	5	B, G, W	BK, BZ, SN, WT
APT60-7Color-P-Finish	60" APT Series Angle Power Strip with 7 Single Receptacles.	60"	7	B, G, W	BK, BZ, SN, WT
APT72-8Color-P-Finish	72" APT Series Angle Power Strip with 8 Single Receptacles.	72"	8	B, G, W	BK, BZ, SN, WT

Custom lengths and device placements available. Contact Design Services at 866-848-9094.

**Position indicates Left (L) or Right (R) side wire entry*

Blue indicates customer choice. Color indicates receptacle color. Finish indicates fixture finish color.

FEATURES

- Slim profile – 1-1/2"
- 120 volt fixture
- 15 amp tamper-resistant single receptacles
- 5-year limited warranty
- Custom options include: adding rocker switch(es), additional receptacles, custom receptacle/switch placement, custom lengths.
- Designed for indoor application
- Simple to install with wood screws and wall anchors (included with fixture)

TECHNICAL INFORMATION

Series	APT Series
Input Voltage	120 volt
Amps	15 amp
Rating	cULus Listed
Mounting	Wood Screws and Wall Anchors (included)
Wiring	12 gauge Romex for receptacles
Environment	Dry locations
Construction Material	Powder coated aluminum

APPLICATIONS

- Kitchens
- Bathrooms
- Offices and computer labs
- Islands
- Shops and garages

RECEPTACLE COLOR & FINISH OPTIONS

Receptacle Colors				
	Black (B)	Black (B)	Grey (G)	White (W)
Finish Options				
	Black (BK)	Bronze (BZ)	Satin Nickel (SN)	White (WT)

CUSTOM OPTIONS


APS-Switch-Color Rocker Switch. Available in Black (B), Grey (G), or White (W)

APT-R-Color-15A Tamper-resistant receptacle. Available in Black (B), Grey (G), or White (W)


OPTIONAL INSTALLATION COMPONENTS

PART NUMBER	DIMENSIONS	DESCRIPTION
APS-BLANK-P-Finish	Varies by order.	APT Series blank filler. Order per linear foot. Available in Black (BK), Bronze (BZ), Satin Nickel (SN), and White (WT).


72" Fixture – APT72-8Color-P-Finish




60" Fixture – APT60-7Color-P-Finish

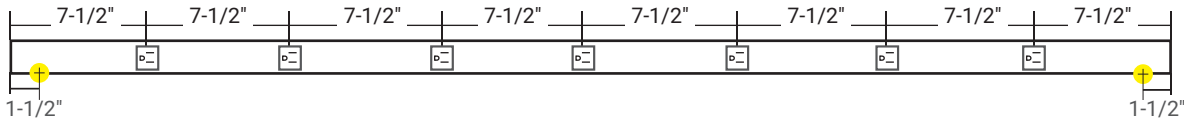


48" Fixture – APT48-5Color-P-Finish

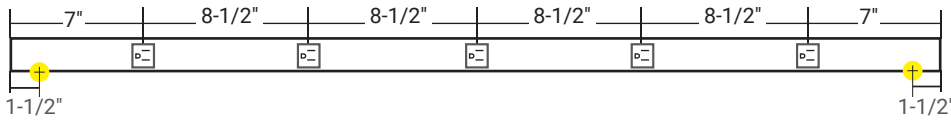


42" Fixture – APT42-5Color-P-Finish

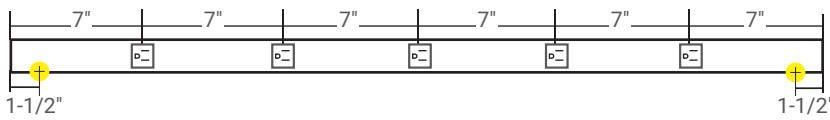


36" Fixture – APT36-4Color-P-Finish




30" Fixture – APT30-4Color-P-Finish




24" Fixture – APT24-4Color-P-Finish




LEGEND

 = 15 amp receptacle available in Black (B), Grey (G), or White (W)


 = Knock-out (all knock-outs are located on the back side of fixture and are 1-1/2" from the end)

LEFT SIDE WIRE ENTRY


**18" Fixture
APT18-3Color-P-Finish-L**



**12" Fixture
APT12-2Color-P-Finish-L**




**9" Fixture
APT9-2Color-P-Finish-L**




RIGHT SIDE WIRE ENTRY


**18" Fixture
APT18-3Color-P-Finish-R**



**12" Fixture
APT12-2Color-P-Finish-R**



**9" Fixture
APT9-2Color-P-Finish-R**



CUSTOM OPTIONS/DETAILS

- Custom lengths from 6" – 92" (larger sizes will have a seam when assembled)
- 120 volt integral switch (available in Black, Grey, or White)
- Additional receptacles
- Custom receptacle/switch placement
- Receptacles must be a minimum of 1-1/2" apart (on center)
- Receptacles must be a minimum of 1" from the end. (Requires wire entry at opposite end of fixture) **Knockout cannot be behind device.**
- Custom charges may apply – Call Design Services at 866-848-9094 for a quote, lead time, and assistance with your custom order