


24 in. fixture shown in Bronze with Black receptacles
TR24-2BD-P-BZ

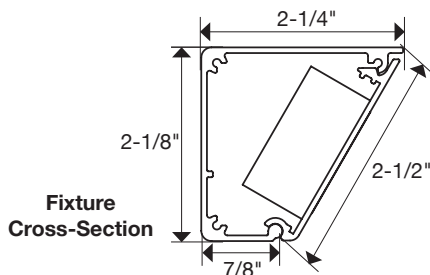

DUPLEX RECEPTACLE ANGLE POWER STRIP

| PART NUMBER | DESCRIPTION | LENGTH | NUMBER OF DUPLEX RECEPTACLES | RECEPTACLE COLOR | FINISH OPTION |
|-----------------------|--|--------|------------------------------|------------------|----------------|
| TR9-1ColorD-P-Finish | 9" TR Series Angle Power Strip with 1 Duplex Receptacle. | 9" | 1 | B, G, W | BK, BZ, SN, WT |
| TR12-1ColorD-P-Finish | 12" TR Series Angle Power Strip with 1 Duplex Receptacle. | 12" | 1 | B, G, W | BK, BZ, SN, WT |
| TR18-2ColorD-P-Finish | 18" TR Series Angle Power Strip with 2 Duplex Receptacles. | 18" | 2 | B, G, W | BK, BZ, SN, WT |
| TR24-2ColorD-P-Finish | 24" TR Series Angle Power Strip with 2 Duplex Receptacles. | 24" | 2 | B, G, W | BK, BZ, SN, WT |
| TR30-2ColorD-P-Finish | 30" TR Series Angle Power Strip with 2 Duplex Receptacles. | 30" | 2 | B, G, W | BK, BZ, SN, WT |
| TR36-2ColorD-P-Finish | 36" TR Series Angle Power Strip with 2 Duplex Receptacles. | 36" | 2 | B, G, W | BK, BZ, SN, WT |
| TR42-3ColorD-P-Finish | 42" TR Series Angle Power Strip with 3 Duplex Receptacles. | 42" | 3 | B, G, W | BK, BZ, SN, WT |
| TR48-3ColorD-P-Finish | 48" TR Series Angle Power Strip with 3 Duplex Receptacles. | 48" | 3 | B, G, W | BK, BZ, SN, WT |
| TR60-4ColorD-P-Finish | 60" TR Series Angle Power Strip with 4 Duplex Receptacles. | 60" | 4 | B, G, W | BK, BZ, SN, WT |
| TR72-4ColorD-P-Finish | 72" TR Series Angle Power Strip with 4 Duplex Receptacles. | 72" | 4 | B, G, W | BK, BZ, SN, WT |

Custom lengths and device placements available. Contact Design Services at 866-848-9094.

Blue indicates customer choice. Color indicates receptacle color. Finish indicates fixture finish color.

FEATURES

- Low profile – 2-1/8"
- 120 volt fixture
- 20 amp tamper-resistant duplex receptacles
- Custom options include: USB ports, switches, phone jacks, cable jacks, data ports, HDMI ports, and more
- 5-year limited warranty
- Designed for indoor application
- Simple to install with wood screws and wall anchors (included with fixture)


TECHNICAL INFORMATION

| | |
|-----------------------|---|
| Series | TR Series |
| Input Voltage | 120 volt |
| Amps | 20 amp |
| Rating | cULus Listed |
| Mounting | Wood Screws and Wall Anchors (included) |
| Wiring | 12 gauge Romex for receptacles |
| Environment | Dry locations |
| Construction Material | Powder coated aluminum |

APPLICATIONS

- Kitchens
- Bathrooms
- Offices and computer labs
- Islands
- Shops and garages


RECEPTACLE COLOR & FINISH OPTIONS

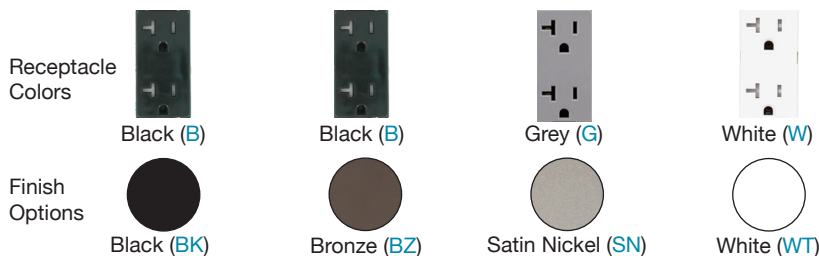


OPTIONAL INSTALLATION COMPONENTS

| PART NUMBER | DIMENSIONS | DESCRIPTION |
|-------------------|------------------|---|
| TR-SQ-JB-P-Finish | 3" x 3" x 2-1/8" | Square junction box. Available in Black (BK), Bronze (BZ), Satin Nickel (SN), and White (WT). |
| TR-BLANK-P-Finish | Varies by order. | TR Series blank filler. Order per linear foot. Available in Black (BK), Bronze (BZ), Satin Nickel (SN), and White (WT). |


72" Fixture – TR72-4ColorD-P-Finish

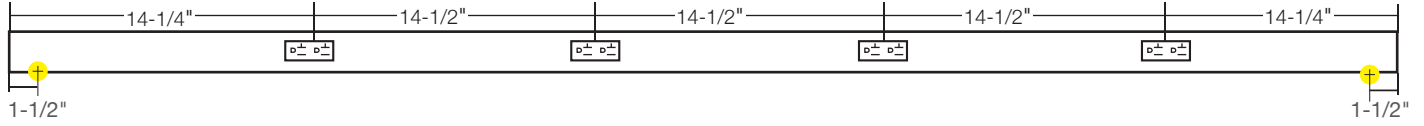


60" Fixture – TR60-4ColorD-P-Finish

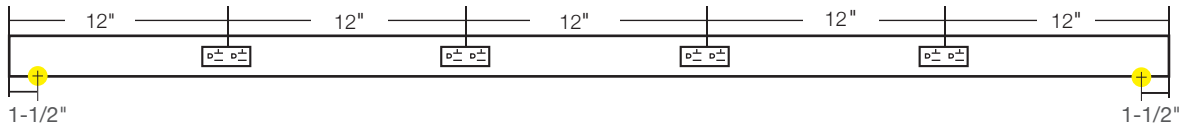


48" Fixture – TR48-3ColorD-P-Finish

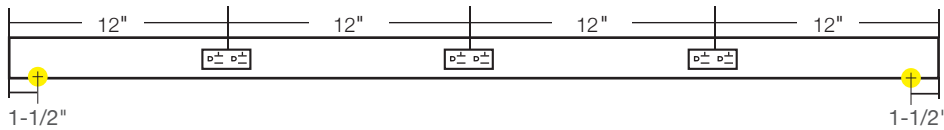


42" Fixture – TR42-3ColorD-P-Finish

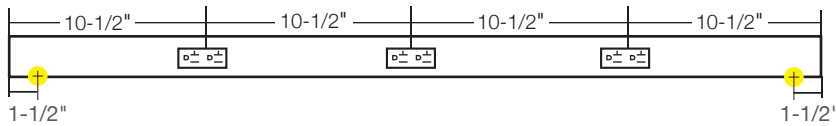


36" Fixture – TR36-2ColorD-P-Finish

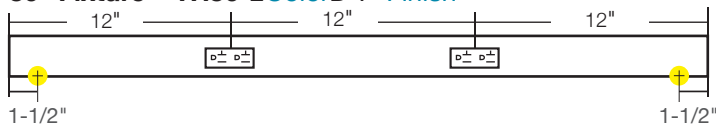


30" Fixture – TR30-2ColorD-P-Finish

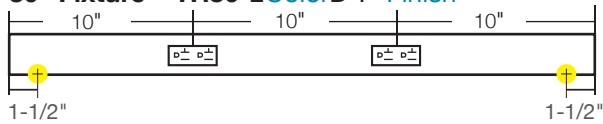


24" Fixture – TR24-2ColorD-P-Finish

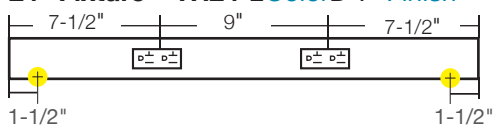


18" Fixture – TR18-2ColorD-P-Finish

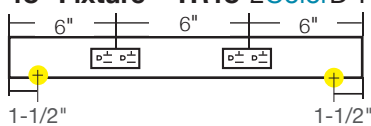


12" Fixture – TR12-1ColorD-P-Finish




9" Fixture – TR9-1ColorD-P-Finish



LEGEND

 = Knock-out (all knock-outs are located on the back side of fixture and are 1-1/2" from the end)

 = 20 amp standard duplex receptacle available in Black (B), Grey (G), or White (W)

CUSTOM OPTIONS/DETAILS

- Custom lengths from 7" – 92" (larger sizes will have a seam when assembled)
- Additional devices
- Custom location of devices
- Receptacles must be a minimum of 5" apart (on center)
- Receptacles must be a minimum of 3" from the end. **Knockout cannot be behind device.**
- Custom charges may apply — Call Design Services at 866-848-9094 for a quote, lead time, and assistance with your custom order

Color Key:
 B = Black
 G = Grey
 W = White
 R = Red
 O = Orange

CUSTOM LENGTHS AND DEVICE OPTIONS


Contact Design Services at 866-848-9094 or e-mail DesignAndSupport@TaskLighting.com for help with custom orders

Custom lengths to the 1/4" from 7" – 92" (sizes over 92" available but will have a seam showing)

Additional devices and placement options available



Receptacles must be placed a minimum of 3" from each end of the fixture to the center of a receptacle and a minimum of 5" apart (from the center of one receptacle to the center of the next)

EXAMPLE FOR RECEPTACLE PLACEMENT

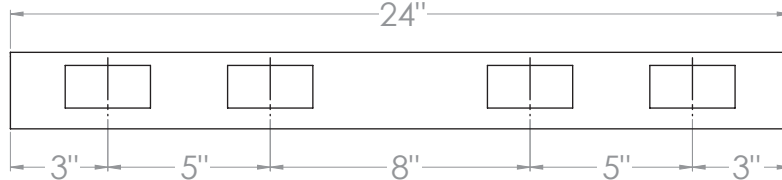

SWITCHES THAT CAN BE ADDED

| Part Number | Description | Color |
|---------------------|---|---------|
| T-T-1Z-WC-RF-Color | TandemLED™ smart control wireless on / off / dimming controller – compatible with TandemLED™ products | B, G, W |
| T-Q-1Z-WC-RF-Color | 1-Zone Uno wireless on / off / dimming controller | B, G, W |
| T-Q-2Z-WC-RF-Color | 2-Zone Duo wireless on / off / dimming controller | B, G, W |
| T-Q-4Z-WC-RF-Color | 4-Zone Quattro wireless on / off / dimming controller | B, G, W |
| T-C-RGBWC-RF-Color | Multi-color RGB wireless on / off / dimming controller | B, G, W |
| TRO-SPS-Color | Decora single-pole rocker switch | B, G, W |
| TRO-SPS-20A-Color | Decora 20 amp single-pole rocker switch | B, G, W |
| TRO-3WS-Color | Decora 3-way rocker switch | B, G, W |
| TRO-3WS-20A-Color | Decora 20 amp 3-way rocker switch | B, G, W |
| TRO-4WS-Color | Decora 4-way rocker switch | B, G, W |
| TRO-DS-2SPS-Color | Decora double switch | B, G, W |
| TRO-DS-(2)3WS-Color | Decora double switch with two 3-way | B, W |
| TRO-DS-1P/3P-Color | Decora double switch with single-pole and 3-way | B, G, W |
| TRO-TS-3SPS-Color | Decora triple switch with three single-pole switches | B, W |



RECEPTACLES THAT CAN BE ADDED

| Part Number | Description | Color |
|---------------------|---|---------------|
| TRO-15A-REC-Color | 15 amp tamper-resistant duplex receptacle | B, G, W |
| TRO-20A-REC-Color | 20 amp tamper-resistant duplex receptacle | B, G, W |
| TRO-HG-20-REC-Color | 20 amp tamper-resistant, hospital grade duplex receptacle. Call for availability on Red (R) and Orange(O) | B, G, W, R, O |



Color Key:
 B = Black
 G = Grey
 W = White

RECEPTACLE COMBOS THAT CAN BE ADDED

| Part Number | Description | Color |
|---------------------|--|---------|
| TRO-USB/REC-Color | Combination 2.4 amp USB ports and 15 amp receptacle | B, G, W |
| TRO-CB-1P/REC-Color | Combination single-pole switch and 15 amp receptacle | B, G, W |
| TRO-CB-3P/REC-Color | Combination 3-way switch and 15 amp receptacle | B, G, W |



TRO-USB/REC



TRO-CB-1P/REC



TRO-CB-3P/REC

CONNECTORS THAT CAN BE ADDED

| Part Number | Description | Color |
|----------------|--|---------|
| TRO-CJ-Color | Decora style cable jack, "F" style, for 75 Ohm coaxial cable | B, G, W |
| TRO-PJ-Color | Decora style 6 conductor telephone jack | B, G, W |
| TRO-HDMI-Color | Decora HDMI port connector | W |



TRO-CJ



TRO-PJ



TRO-HDMI

PORT FRAMES THAT CAN BE ADDED

| Part Number | Description | Color |
|-----------------|---|---------|
| TRO-2Port-Color | Decora insert for 2 snap-in connectors for voice, data, & video | B, G, W |
| TRO-3Port-Color | Decora insert for 3 snap-in connectors for voice, data, & video | B, G, W |
| TRO-4Port-Color | Decora insert for 4 snap-in connectors for voice, data, & video | B, G, W |
| TRO-6Port-Color | Decora insert for 6 snap-in connectors for voice, data, & video | B, G, W |



TRO-2PORT



TRO-3PORT



TRO-4PORT



TRO-6PORT

SNAP-IN CONNECTORS THAT CAN BE ADDED

| Part Number | Description | Color |
|---------------------|---|---------|
| TRO-CON-Blank-Color | Blank insert used to cover up any unused opening in any port frames | B, G, W |
| TRO-CON-CAT6-Color | Snap-in data cat6, 8 conductor channel rated connector. 250MHZ | B, G, W |
| TRO-CON-CJ-Color | Snap-in cable jack | B, G, W |
| TRO-CON-PJ-8-Color | 8 conductor USOC voice grade phone (jack) connector | B, G, W |
| TRO-CON-HDMI-Color | HDMI feed through quick port connector | B, W |



TRO-CON-BLANK



TRO-CON-CAT6



TRO-CON-CJ



TRO-CON-PJ



TRO-CON-HDMI

INTEGRAL POWER SUPPLIES – USE WITH LED LIGHTING

| Part Number | Description |
|-----------------|--|
| TRO-LPV-20W-12V | 12V DC 20 watt LED power supply (use with wireless dimming system) |
| TRO-LPV-35W-12V | 12V DC 35 watt LED power supply (use with wireless dimming system) |



TRO-LPV