


FAIRFIELD®

Old World Quality New Age Design

CALLAN®

DIMENSIONS

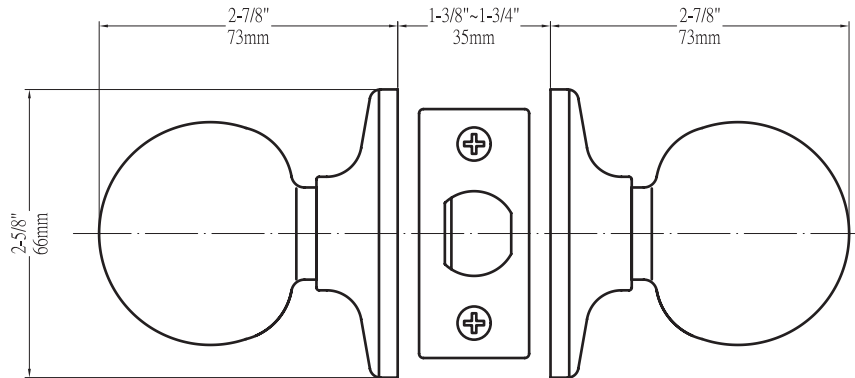

STANDARD SPECIFICATIONS

Door Prep	Cross bore: 2-1/8" Edge bore: 1" Latch face: 1" x 2-1/4"	Latches	Entrance: 2-3/8" & 2-3/4" adjustable (9073) Passage/Privacy: 2-3/8" & 2-3/4" adjustable (9074) Faceplate: 1" x 2-1/4" round corner Bolt: 1/2" throw
Backset	Fits 2-3/8" and 2-3/4"	Strikes	1-3/4" x 2-1/4" full lip round corner (9103)
Door Thickness	1-3/8" ~ 1-3/4" door standard	Wood Screws	Combination screws that suit both wood or metal door mounting
Cylinder	KW1 5-pin standard ; Entries packed KA5	Door Handing	Not Required

PRICING

NEW

Model	Function	WT/ LB	CTN QTY		US3 Bright Brass	US5 Antique Brass	US15 Satin Nickel	US15A Antique Nickel	US10B Oil Rubbed Bronze	US10BE Edged Bronze	BLACK
100T - FD	Entrance	27 Lbs	20 Pcs	Item No.	KR1003	KR1005	KR1001	KR1008	KR1000	KR1007	KR1004
				List Price							
101T - FD	Passage	22 Lbs	20 Pcs	Item No.	KR1013	KR1015	KR1011	KR1018	KR1010	KR1017	KR1014
				List Price							
102T - FD	Privacy	22 Lbs	20 Pcs	Item No.	KR1023	KR1025	KR1021	KR1028	KR1020	KR1017	KR1024
				List Price							
115 - FD	Dummy	9 Lbs	20 Pcs	Item No.	KR1053	KR1055	KR1051	KR1058	KR1050	KR1057	KR1054
				List Price							

FUNCTIONS

Entrance (100)	Passage (101)
Privacy (102)	Dummy (115)



THE DELANEY CO.

Copyright © THE DELANEY CO. All rights reserved.