


SOMERSET

Old World Quality New Age Design

CALLAN®

DIMENSIONS

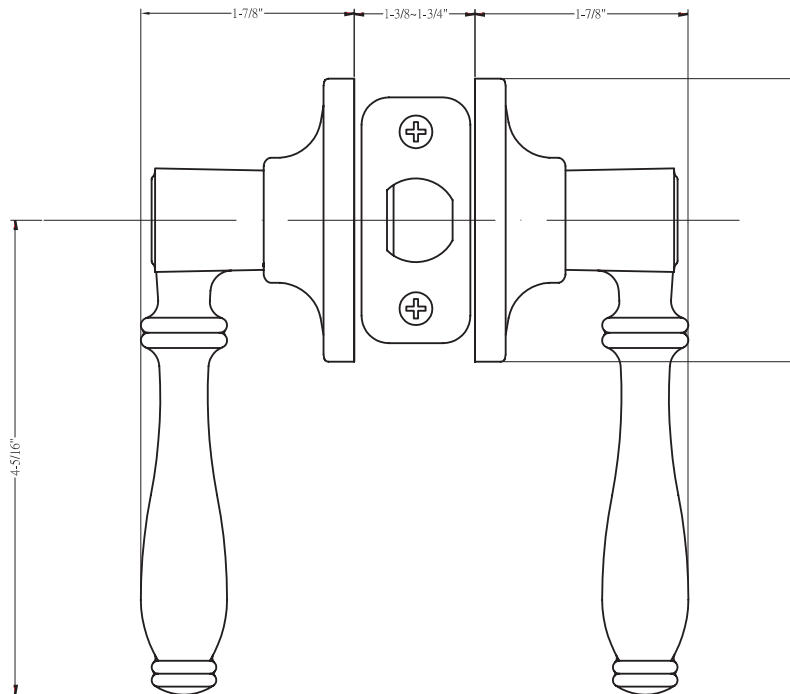

STANDARD SPECIFICATIONS

Door Prep	Cross bore: 2-1/8" Edge bore: 1" Latch face: 1" x 2-1/4"
Backset	Fits 2-3/8" and 2-3/4"
Door Thickness	1-3/8" ~ 1-3/4" door standard
Cylinder	KW1 5-pin standard ; SC1 5-pin optional Entries packed KA5
Latches	Entrance: 2-3/8" & 2-3/4" adjustable (9073) Passage/Privacy: 2-3/8" & 2-3/4" adj. (9074) Faceplate: 1" x 2-1/4" round corner Bolt: 1/2" throw
Strikes	1-3/4" x 2-1/4" full lip round corner (9103)
Wood Screws	Combination screws that suit both wood or metal door mounting
Door Handling	Non-handed

PRICING

Model	Function	WT/ CTN	CTN QTY		US15 Satin Nickel	US26 Polished Chrome	US10BE Edged Bronze	Antique Silver
500T - ST	Entrance	35 Lbs	20 Pcs	Item No.	ST5101	ST5106	ST5107	ST5102
				List Price				
501T - ST	Passage	23 Lbs	20 Pcs	Item No.	ST5011	ST5016	ST5017	ST5012
				List Price				
502T - ST	Privacy	24 Lbs	20 Pcs	Item No.	ST5021	ST5026	ST5027	ST5022
				List Price				
515 - ST	Dummy	15 Lbs	20 Pcs	Item No.	ST5051	ST5056	ST5057	ST5052
				List Price				

FUNCTIONS

	Entrance (500)		Passage (501)
	Privacy (502)		Dummy (515)


THE DELANEY CO.

Copyright © THE DELANEY CO. All rights reserved.

Effective 10/1/2012