




Contemporary Heavy Duty Residential Lever Specifications



Verona (VL)

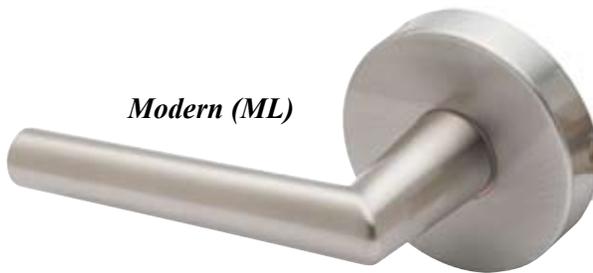


Modern (ML)



Available UL LISTED



Meets ADA Regulations

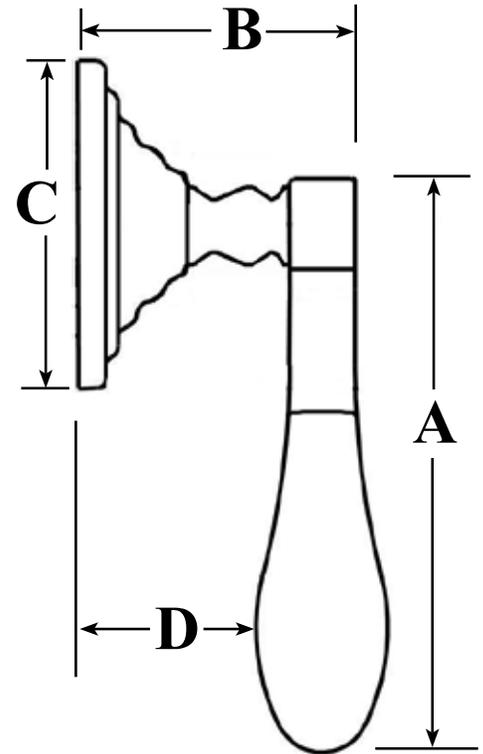

	A	B	C	D
VL	4-1/4"	2-1/4"	2-1/2"	1-5/8"
ML	4-1/4"	2-1/4"	2-1/2"	1-3/4"

Lever Specifications & Options	
ANSI / BHMA	Exceeds ANSI Grade-3 - 200,000 cycles
Rose Diameter	2-1/2" with concealed screws
Cylinder	5 pin "KW1" std. 5 pin "C" optional .
Keying	As specified: Available Master keyed, Builder keyed, KD, KA.
Latch	Adjustable backset, 1" round corner narrow faceplate std. Square corner or drive-in adjustable latch optional.
Strike	PT-LS06: 2-3/4" full lip round corner strike std.
Door Prep	1" edge bore, 1"x 2-1/4" latch mortise, 2-1/8" cross bore, 2-3/8" backset standard, 2-3/4" optional.
Door Thickness	Min 1-3/8", Max 1-3/4".
Handing	Non-handed
U.L. Labeled	Available 90-minute U.L. Labeled.
Warranty	Lifetime mechanical, 10 year finish.

In Stock Finish				Special Order Finishes				Case Qty
STYLE	SS	TB	PS	AB	AN	BC	PB	Units
VL	x	x	x					18
ML	x	x	x					

Function	Operation
2220 Passage	Passage: Both levers always free turning. No locking operation.
2231 Privacy	Inside push button locks or unlocks both levers. Rotating inside lever unlocks allowing for emergency egress.
2290 1/2 Dummy	1/2 Dummy - Used as pull or decorative trim only.