

DF-LED7771


POST TOP FIXTURE




Slipfitter Included

- **Material:** Powder Coated Cast Aluminum
- **Lens:** Clear, Polycarbonate Lens
- **Available Finish:** Black, Verde Green
- **Color Temperature:** 4000K
- **Lumens:** 37,500 Lm
- **0 - 10V Dimming Standard**
- **UL Listed**

Model Number	Illuminant Type	Base Type	Wattage (W)	Volatage (V)	Color Temp.	Lamp(s) Included	Lens Type
DF7771-LB300-T3-40K-B	LED	LED Board	300W	100V-277V	40K	Yes	Type 3
DF7771-LB300-T4-40K-B	LED	LED Board	300W	100V-277V	40K	Yes	Type 4
DF7771-LB300-T5-40K-B	LED	LED Board	300W	100V-277V	40K	Yes	Type 5

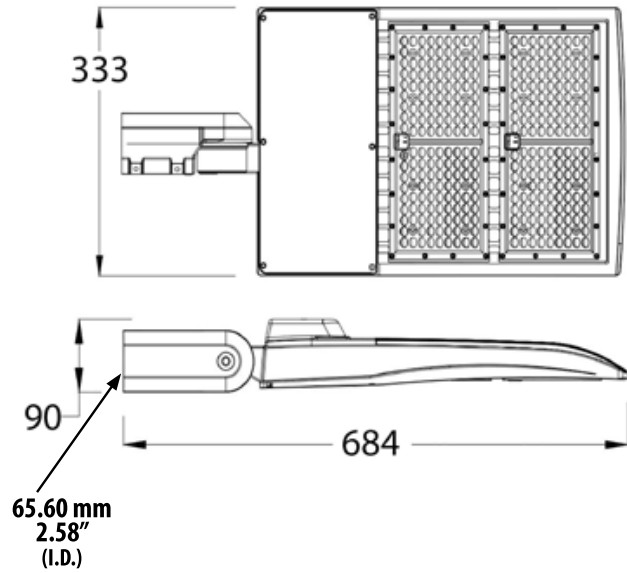


TYPE III




TYPE 3 Light Distribution

TYPE IV



TYPE 4 Light Distribution

TYPE V



TYPE 5 Light Distribution

Overall Dimensions:
26.92"H x 13.11"W x 3.54"D

Weight: 18 lbs
Approximate Wire Length: N/A
Box Dimensions:

DF-LED7771




Photometric Results


IES Classification: Type V
Total Rated Lamp Lumens: 38518.28 lm
Efficiency: 100%
Upward Ratio: 0%
Central Intensity: 4305.37 cd
Pos of Max. Intensity: H225 V77

Longitudinal Classification: Medium
Measurement Flux: 38518.28 lm
Downward Ratio: 100%
Luminaire Efficacy Rating (LER): 127.35
Max. Intensity: 11104.35 cd

Luminous Intensity Distribution Curve

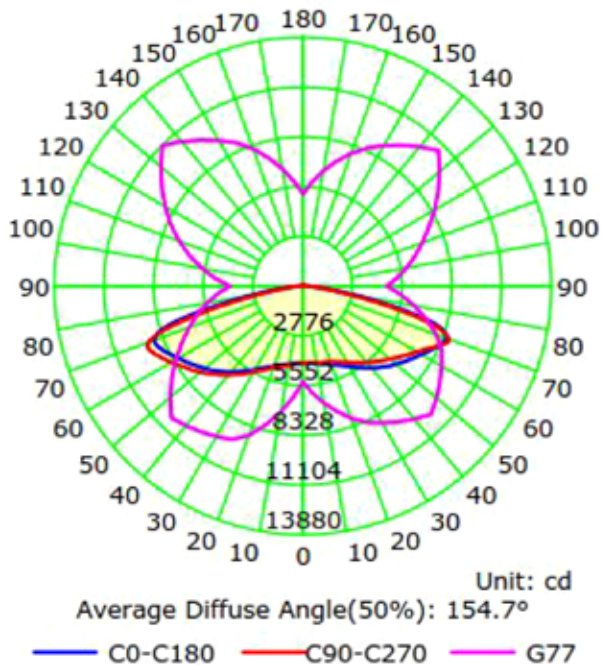

The Average Illuminance Effective Figure

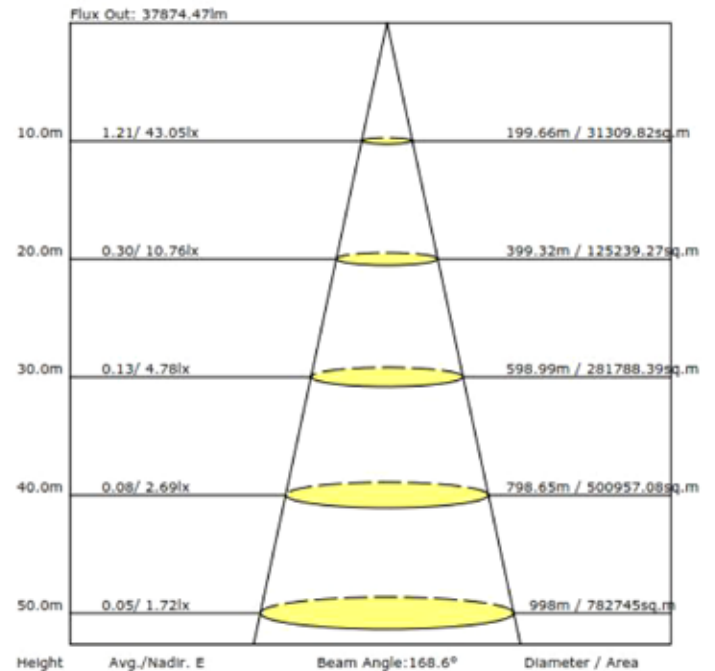

DABMAR
LIGHTING

DABMAR LIGHTING INCORPORATED

320 Graves Ave . Oxnard, CA 93030 . 805.604.9090 . f: 805.604.9050 . www.dabmar.com

4693 19th Street Ct E . Bradenton, FL 34203