




24" fixture shown in Satin Nickel
with Grey receptacles
APT24-4G-P-SN

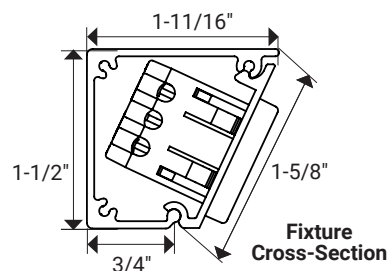

ABOUT THE PRODUCT

- Slim profile: 1-1/2"
- 20-amp tamper-resistant single receptacles
- Available in standard and custom fixtures
- Custom options include: rocker switches, additional receptacles, and length
- Simple to install fully assembled fixture with wood screws and wall anchors (included)
- Designer finishes to blend with any décor
- UL listed

Ordering information

120-volt single receptacles, available in standard and custom fixture options

Length	Number of Receptacles	Part Number
9" (229 mm)	2	APT9-2Color-P-Finish-*Position
12" (305 mm)	2	APT12-2Color-P-Finish-*Position
18" (457 mm)	3	APT18-3Color-P-Finish-*Position
24" (610 mm)	4	APT24-4Color-P-Finish
30" (762 mm)	4	APT30-4Color-P-Finish
36" (914 mm)	4	APT36-4Color-P-Finish
42" (1067 mm)	5	APT42-5Color-P-Finish
48" (1219 mm)	5	APT48-5Color-P-Finish
60" (1524 mm)	7	APT60-7Color-P-Finish
72" (1829 mm)	8	APT72-8Color-P-Finish

Custom lengths, receptacle placements, and optional rocker switch placement available.
Contact Design Services at 866-848-9094

*Position indicates Left (L) or Right (R) side wire entry.

Blue indicates dealer choice: Color indicates receptacle color, and Finish indicates fixture finish color.

APPLICATIONS

Under cabinet

Offices and computer labs

Shops and garages

For additional application help and suggestions, call Design Services at 866-848-9094

TECHNICAL INFORMATION

Input Voltage	120-volt AC
Rating	cULus Listed
Amps	20-amp
Mounting	Wood screws and wall anchors (included)
Wiring	12-gauge Romex for receptacles
Environment	Dry locations
Construction Material	Powder-coated aluminum
Warranty	5 years

RECEPTACLE COLOR AND COORDINATING FINISH




Ordering information


Custom options

Description	Part Number
20-amp tamper-resistant receptacles to add to custom fixtures. Available in Black (B), Grey (G), or White (W).	TR-20A-303033-Color
15-amp rocker switch to add to custom fixtures. Available in Black (B), Grey (G), or White (W).	APS-Switch-Color


72" Fixture—APT72-8Color-P-Finish




60" Fixture—APT60-7Color-P-Finish

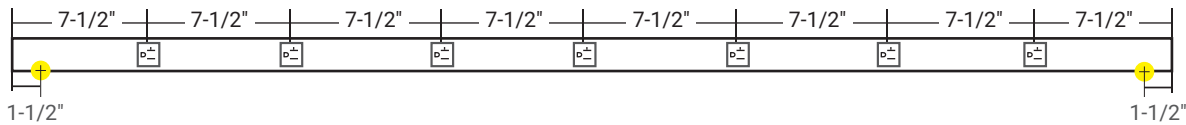


48" Fixture—APT48-5Color-P-Finish

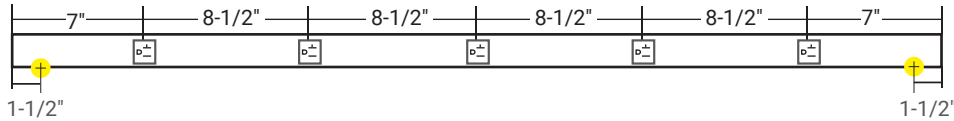


42" Fixture—APT42-5Color-P-Finish




36" Fixture—APT36-4Color-P-Finish



30" Fixture—APT30-4Color-P-Finish

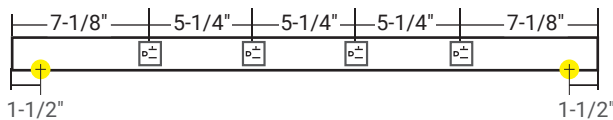


24" Fixture—APT24-4Color-P-Finish




LEFT SIDE WIRE ENTRY


**18" Fixture
APT18-3Color-P-Finish-L**



**12" Fixture
APT12-2Color-P-Finish-L**




**9" Fixture
APT9-2Color-P-Finish-L**




RIGHT SIDE WIRE ENTRY


**18" Fixture
APT18-3Color-P-Finish-R**



**12" Fixture
APT12-2Color-P-Finish-R**



**9" Fixture
APT9-2Color-P-Finish-R**



LEGEND

 = 20-amp receptacle available in Black (B), Grey (G), or White (W)

 = Knockout (all knockouts are located on the back side of fixture and are 1-1/2" from the end)

CUSTOM OPTIONS/DETAILS

- Custom lengths from 6"—92" (larger sizes will have a seam when assembled)
- 120-volt integral switch (available in Black, Grey, or White)
- Additional receptacles
- Custom receptacle/switch placement
- Receptacles must be a minimum of 1-1/2" apart (on center)
- Receptacles must be a minimum of 2" from the end. (Requires wire entry at opposite end of fixture—**knockout cannot be behind device**)
- 4-1/2" of room suggested for wire entry at knockout location
- Custom charges and additional design limitations may apply—Call Design Services at 866-848-9094 for a quote, lead time, and assistance with your custom order