




24 in. fixture shown in Black with Black receptacles
TR24-2BD-P-BK

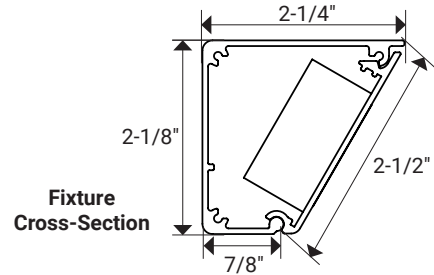

ABOUT THE PRODUCT

- Low profile: 2-1/8"
- 20-amp tamper-resistant duplex receptacles
- Available in standard and custom fixtures
- Custom options include: USB ports, switches, phone jacks, cable jacks, data ports, HDMI ports, and more: see following pages for more options
- Simple to install fully assembled fixture with wood screws and wall anchors (included)
- Designer finishes to blend with any décor
- UL listed

Ordering information

120-volt duplex receptacles, available in standard and custom fixture options

Length	Number of Receptacles	Part Number
9" (229 mm)	2	TR9-1Color-P-Finish
12" (305 mm)	2	TR12-1Color-P-Finish
18" (457 mm)	3	TR18-2Color-P-Finish
24" (610 mm)	4	TR24-2Color-P-Finish
30" (762 mm)	4	TR30-2Color-P-Finish
36" (914 mm)	4	TR36-2Color-P-Finish
42" (1067 mm)	5	TR42-3Color-P-Finish
48" (1219 mm)	5	TR48-3Color-P-Finish
60" (1524 mm)	7	TR60-4Color-P-Finish
72" (1829 mm)	8	TR72-4Color-P-Finish

Custom lengths, receptacle placements, and multiple custom options available.
Contact Design Services at 866-848-9094

Blue indicates dealer choice: Color indicates receptacle color and Finish indicates fixture finish color.

APPLICATIONS

Under cabinet

Offices and computer labs

Shops and garages

For additional application help and suggestions, call Design Services at 866-848-9094

TECHNICAL INFORMATION

Input Voltage	120-volt AC
Rating	cULus Listed
Amps	20-amp
Mounting	Wood screws and wall anchors (included)
Wiring	12-gauge Romex for receptacles
Environment	Dry locations
Construction Material	Powder-coated aluminum
Warranty	5 years

RECEPTACLE COLOR AND COORDINATING FINISH




Black (B) Black (B) Grey (G) White (W)

Ordering information


Optional installation components

Dimensions	Description	Part Number
3" x 3" x 2-1/8"	Square junction box. Available in Black (BK), Bronze (BZ), Satin Nickel (SN), and White (WT)	TR-SQ-JB-P-Finish
Varies by order	TR Series blank filler. Order per linear foot. Available in Black (BK), Bronze (BZ), Satin Nickel (SN), and White (WT)	TR-BLANK-P-Finish


72" Fixture—TR72-4 Color D-P-Finish

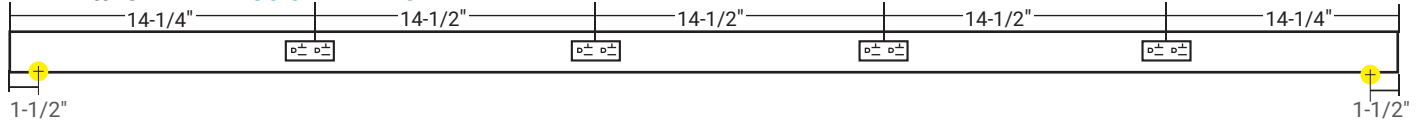


60" Fixture—TR60-4 Color D-P-Finish

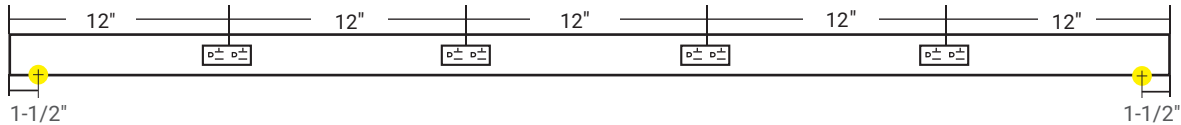


48" Fixture—TR48-3 Color D-P-Finish

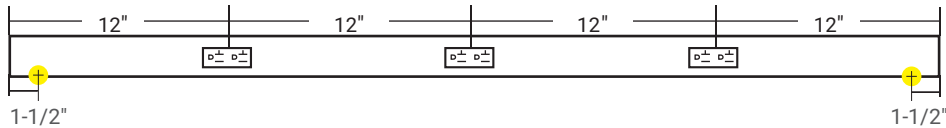


42" Fixture—TR42-3 Color D-P-Finish

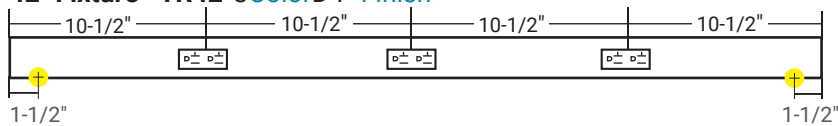


36" Fixture—TR36-2 Color D-P-Finish

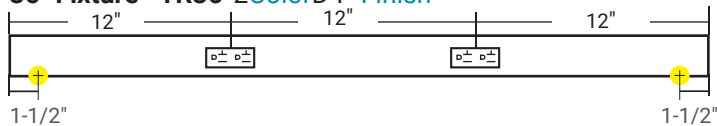


30" Fixture—TR30-2 Color D-P-Finish

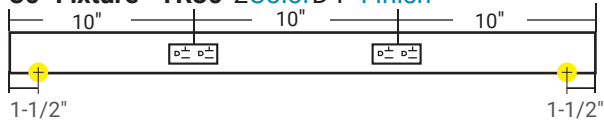


24" Fixture—TR24-2 Color D-P-Finish




18" Fixture—TR18-2 Color D-P-Finish

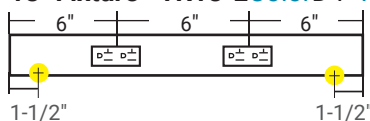

12" Fixture—TR12-1 Color D-P-Finish



9" Fixture—TR9-1 Color D-P-Finish



LEGEND

 = Knockout (all knockouts are located on the back side of fixture and are 1-1/2" from the end)

 = 20-amp standard duplex receptacle available in Black (B), Grey (G), or White (W)


CUSTOM OPTIONS/DETAILS

- Custom lengths from 7"—92" (larger sizes will have a seam when assembled)
- Additional devices (page 52)
- Custom location of devices
- Receptacles must be a minimum of 5" apart (on center)
- Receptacles must be a minimum of 3" from the end (**knockout cannot be behind device**)
- 4-1/2" of room suggested for wire entry at knockout location
- Custom charges and additional design limitations may apply—Call Design Services at 866-848-9094 for a quote, lead time, and assistance with your custom order

CUSTOM LENGTHS AND DEVICE OPTIONS

- Custom charges and additional design limitations may apply—Call Design Services at 866-848-9094
- Custom lengths to the 1/16" from 7"–90" (sizes over 90" are available but will have a seam showing)
- Additional devices and placement options available
- 4-1/2" of room suggested for wire entry at knockout location
- Receptacles must be placed a minimum of 3" from each end of the fixture to the center of a receptacle and a minimum of 5" apart (from the center of one receptacle to the center of the next)

EXAMPLE FOR RECEPTACLE PLACEMENT

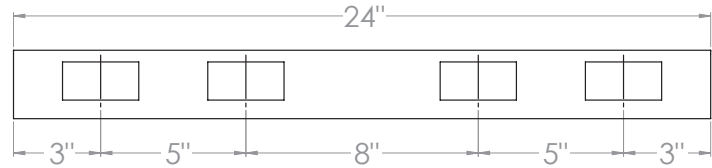

SWITCH OPTIONS TO ADD

Part Number	Description	Color
T-T-1Z-WC-RF- Color	Tunable-white wireless on/off, dimming and white light temperature changing controller—ONLY compatible with tunable-white lighting products	BK, GR, WT
T-Q-1Z-WC-RF- Color	1-Zone wireless on/off and dimming controller	BK, GR, WT
T-Q-2Z-WC-RF- Color	2-Zone wireless on/off and dimming controller	BK, GR, WT
T-Q-4Z-WC-RF- Color	4-Zone wireless on/off and dimming controller	BK, GR, WT
T-C-RGBWC-RF- Color	Multi-color RGB wireless on/off, dimming, and color changing controller	BK, GR, WT
TRO-SPS- Color	Decora single-pole rocker switch	BK, GR, WT
TRO-SPS-20A- Color	Decora single-pole rocker switch	B, G, W
TRO-3WS- Color	Decora 20-amp 3-way rocker switch	B, G, W
TRO-3WS-20A- Color	Decora 20-amp 3-way rocker switch	B, G, W
TRO-4WS- Color	Decora 20-amp 4-way rocker switch	B, G, W
TRO-DS-2SPS- Color	Decora 20-amp double switch	B, G, W
TRO-DS-(2)3WS- Color	Decora 20-amp double switch with two 3-way	B, W
TRO-DS-1P/3P- Color	Decora 20-amp double switch with single-pole and 3-way	B, G, W
TRO-TS-3SPS- Color	Decora 20-amp double switch with single-pole and 3-way	B, W



Tunable-White Controller
T-T-1Z-WC-RF-WT



1-Zone Controller
T-Q-1Z-WC-RF-WT



2-Zone Controller
T-Q-2Z-WC-RF-WT



4-Zone Controller
T-Q-4Z-WC-RF-WT



RGB Controller
T-C-RGBWC-RF-WT



TRO-3WS, TRO-4WS,
TRO-SPS



TRO-DS-2SPS,
TRO-DS-(2)3WS,
TRO-DS-1P/3P



TRO-TS-3SPS

RECEPTACLE OPTIONS TO ADD

Part Number	Description	Color
TRO-15A-REC- Color	15-amp tamper-resistant duplex receptacle	B, G
TRO-20A-REC- Color	20-amp tamper-resistant duplex receptacle	B, G, W
TRO-HG-20-REC- Color	20-amp tamper-resistant, hospital grade duplex receptacle. Call for availability on Red (R) and Orange (O)	B, G, W, R, O



TRO-15A-REC



TRO-20A-REC



TRO-HG-20-REC

COLOR KEY

B = Black
G = Grey
W = White
R = Red
O = Orange

RECEPTACLE COMBO OPTIONS TO ADD

Part Number	Description	Color
TRO-USB/REC-Color	Combination 2.4-amp USB-A ports and 15-amp receptacle	B, G, W
TRO-CB-1P/REC-Color	Combination single-pole switch and 15-amp receptacle	B, G, W
TRO-CB-3P/REC-Color	Combination 3-way switch and 15-amp receptacle	B, G, W,



TRO-USB/REC



TRO-CB-1P/REC



TRO-CB-3P/REC

DATA CONNECTOR OPTIONS TO ADD

Part Number	Description	Color
TRO-CJ-Color	Decora-style cable jack, "F" style, for 75-Ohm coaxial cable	B, G, W
TRO-PJ-Color	Decora-style 6-conductor telephone jack	B, G, W
TRO-HDMI-Color	Decora HDMI port connector	W



TRO-CJ



TRO-PJ



TRO-HDMI

PORT FRAME OPTIONS TO ADD

Part Number	Description	Color
TRO-2Port-Color	Decora insert for 2 snap-in connectors for voice, data, & video	B, G, W
TRO-3Port-Color	Decora insert for 3 snap-in connectors for voice, data, & video	B, G, W
TRO-4Port-Color	Decora insert for 4 snap-in connectors for voice, data, & video	B, G, W
TRO-6Port-Color	Decora insert for 6 snap-in connectors for voice, data, & video	B, G, W



TRO-2PORT



TRO-3PORT



TRO-4PORT



TRO-6PORT

SNAP-IN DATA CONNECTOR OPTIONS TO ADD

Part Number	Description	Color
TRO-CON-Blank-Color	Blank insert used to cover up any unused opening in any port frames	B, G, W
TRO-CON-Blank-Color	Snap-in data cat6, 8-conductor channel rated connector. 250MHZ	B, G, W
TRO-CON-CJ-Color	Snap-in cable jack	B, G, W
TRO-CON-PJ-8-Color	8-conductor USOC voice grade phone (jack) connector	B, G, W
TRO-CON-HDMI-Color	HDMI feed through quick port connector	B, W



TRO-CON-BLANK



TRO-CON-CAT6



TRO-CON-CJ



TRO-CON-PJ



TRO-CON-HDMI

INTEGRAL POWER SUPPLIES USED WITH LED LIGHTING

Part Number	Description
TRO-LPV-20W-12V	12-volt DC 20-watt LED power supply (use with wireless dimming system)
TRO-LPV-35W-12V	12-volt DC 35-watt LED power supply (use with wireless dimming system)



TRO-LPV

COLOR KEY

B = Black
G = Grey
W = White