

Gallery MEDICINE CABINET




FEATURES/TYPICAL SPECIFICATIONS

- Recess or Surface Mount Installation
 - Wall Opening/Rough-in Dimensions (for recess applications): 14 1/4" x 24" x 4"
- Formed and welded flush design steel housing (WB/ST)
 - 23 gauge steel with white, heat cured, acrylic paint finish
 - 1/8" thick float glass mirror with polished edges on housing back
- Frameless Mirror door
 - 5/32" float glass mirror door front with 1" beveled edge, 4 sides (1 BVL)
 - 3/32" float glass mirror door back
 - Aluminum extrusion inner core with white, heat cured enamel paint finish and a cushioned close bumper strip
- 170° euro hinge with soft-close mechanism (HG02) (2 typical)
- Reversible for left-hand or right-hand door swing
- 3/16" thick float glass shelves, adjustable (3 typical)
- Snap-Fit shelf supports (20 typical)
- Includes installation hardware
- Standard Pallet Quantity of 21 units

Finishes:

Housing: PT01 — Basic White
 Mirror: 1 BVL — 1" Bevel Edge
 Frame: Frameless

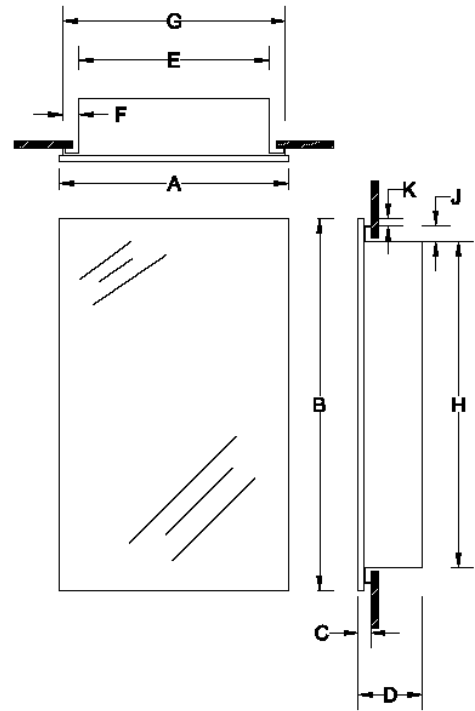

NOTE: Surface mount installation requires a Surface Mount Kit, 760024 (not included)

| | | Dimensions In Inches | | | | | | | | | |
|----------|-----------------------------|----------------------|--------|---|---|--------|-----|----|--------|-----|------|
| Model # | Description | A | B | C | D | E | F | G | H | J | K |
| 72WH244D | MEDCAB 1DR 15X25 FMLS WB/ST | 15 5/8 | 25 5/8 | 1 | 5 | 13 1/2 | 3/4 | 15 | 23 1/2 | 3/4 | 1/16 |

| REFERENCE | QTY. | REMARKS | Project |
|-----------|------|---------|--------------|
| | | | Location |
| | | | Architect |
| | | | Engineer |
| | | | Contractor |
| | | | Submitted by |
| | | | Date |

* All models and material specifications are subject to change or withdrawal without notice.