



The diagrams below show the proper installation heights for 4C mailboxes factoring USPS and accessibility codes. Consult with local authorities for specific standards.

Note: 3700 series 4C standard horizontal mailboxes and parcel lockers have been U.S.P.S. approved and meet the specifications of USPS-STD-4C and are required for new construction and major renovations. All units are shown mounted as low as the USPS mounting height requirements permit to maximize the number of mailboxes that fall below the ADA upper reach limits of 48".

MAXIMUM HEIGHT UNITS ADA compliant compartment 67" AFF • 🗆 • 🗆 • 🗆 48" AFF 0 🗆 • 🗆 : 1 : 412.00 :0:1 · 3029 :0:1535 · 1 1918 9 🗆 • 0 • 🗆 0 • 🙃 28" AFF • □ • 🗆 • 🗆 e -• 🗆 e 🗆 • 🗆 • 🗆 . • 🗆 • 🗆 15" AFF 3716D-20 3716D-19 3716D-09 3716D-07 3716S-09 3716S-04 (20 MB1 - 2 PL) (19 MB1 - 2 PL) (7 MB2 - 2 MB3 - 2 PL) (1 MB2 - 6 MB3 - 2 PL) (9 MB1 - 1 PL) (3MB2-1MB3-1PL) (3MB3-1PL) Finished Floor ////

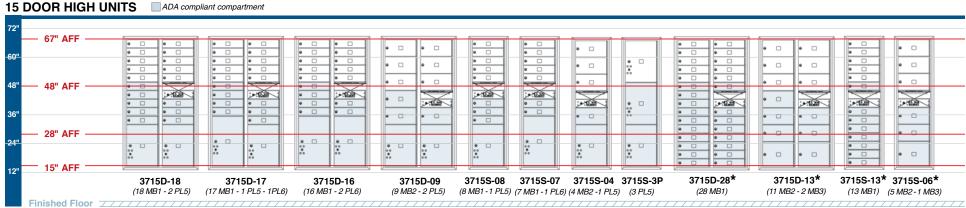

*These noted units do not meet U.S.P.S. installation specifications and are for private delivery only unless approved by local postal officials.

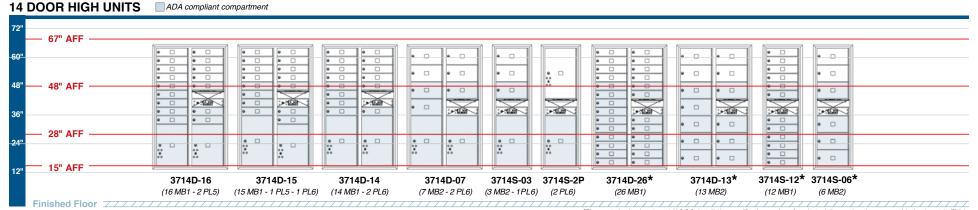


*These noted units do not meet U.S.P.S. installation specifications and are for private delivery only unless approved by local postal officials.

(2/28/14)




The diagrams below show the proper installation heights for 4C mailboxes factoring USPS and accessibility codes Consult with local authorities for specific standards.

Note: 3700 series 4C standard horizontal mailboxes and parcel lockers have been U.S.P.S. approved and meet the specifications of USPS-STD-4C and are required for new construction and major renovations. All units are shown mounted as low as the USPS mounting height requirements permit to maximize the number of mailboxes that fall below the ADA upper reach limits of 48".

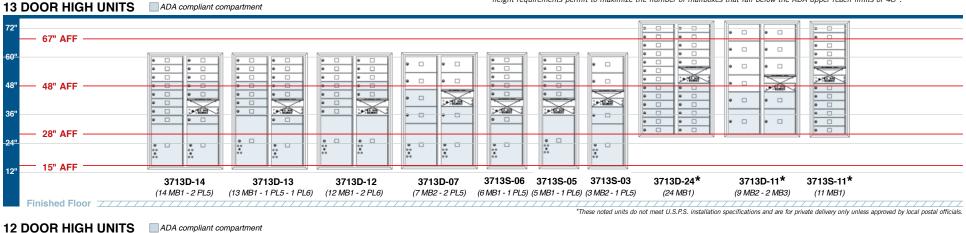


67" AFF • 🗆 • 🗆 • 🗆 48" AFF • 🗆 9:1 P. C. · (1) -28" AFF • □ • □ 00 • □ • □ • □ • -• □ ø □ • _ • 🗆 • 🗆 15" AFF 3712D-12 3712D-11 3712D-10 3712D-05 3712D-4P 3712S-02 3712S-2P 3712D-22* 3712S-10* (11 MB1 - 1 PL5 - 1 PL6) (10 MB1) (12 MB1 - 2 PL5) (10 MB1 - 2 PL6) (5 MB2-2 PL6) (4 PL6) (2 MB2 - 1 PL6) (2 PL6) (22 MB1) Finished Floor 7//// *These noted units do not meet U.S.P.S. installation specifications and are for private delivery only unless approved by local postal officials.

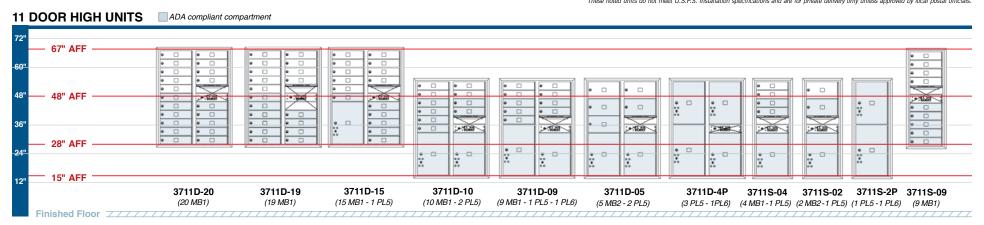



The diagrams below show the proper installation heights for 4C mailboxes factoring USPS and accessibility codes. Consult with local authorities for specific standards.

Note: 3700 series 4C standard horizontal mailboxes and parcel lockers have been U.S.P.S. approved and meet the specifications of USPS-STD-4C and are required for new construction and major renovations. All units are shown mounted as low as the USPS mounting height requirements permit to maximize the number of mailboxes that fall below the ADA upper reach limits of 48".

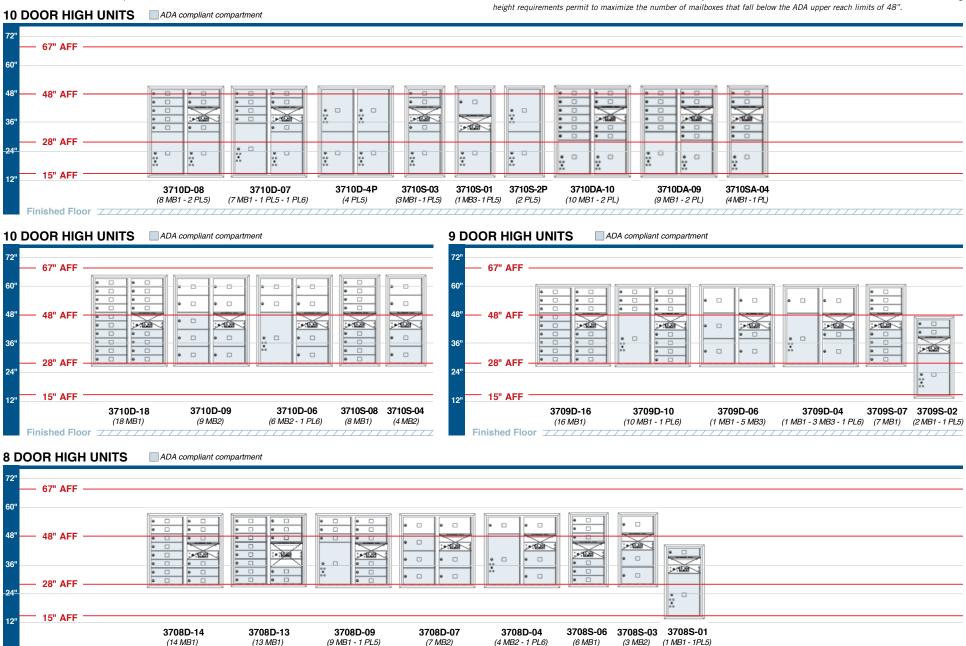

Finished Floor ////////////



The diagrams below show the proper installation heights for 4C mailboxes factoring USPS and accessibility codes Consult with local authorities for specific standards.

Note: 3700 series 4C standard horizontal mailboxes and parcel lockers have been U.S.P.S. approved and meet the specifications of USPS-STD-4C and are required for new construction and major renovations. All units are shown mounted as low as the USPS mounting height requirements permit to maximize the number of mailboxes that fall below the ADA upper reach limits of 48"

