

TOTO®

CST744E(G) Eco Drake® Close Coupled Toilet, 1.28 GPF



CST744E(G) - Eco Drake® Close Coupled Toilet with SS114 - SoftClose® Seat



E-Max® Technology: Quiet, powerful, commercial grade flushing performance.



Choose a SoftClose® toilet seat, or upgrade to a Washlet.



Fast Flush: New, wide 3" flush valve is 125% larger than conventional 2" flush valves.



SanaGloss® glaze seals the surface, creating a finish that actually repels stains caused by buildup of mineral deposits.



- Contemporary, high profile design
- E-Max® Technology
- Powerful, quiet flush every time
- Wide, 2-1/8" computer designed trapway
- Large water surface

High profile close coupled toilet. Low consumption (1.28 Gpf/4.8 Lpf) siphon jet flushing action.

Tank cover, fittings, chrome plated trip lever, less seat.

■ **CST744E**
Elongated, 12" rough-in, less seat.

■ **CST744EG**
Elongated, 12" rough-in, less seat. Available color: #01

□ **C744E**
Elongated bowl only, 12" rough-in.

□ **C744EG**
Elongated bowl only, 12" rough-in. with Sanagloss ceramic glaze. Available color: #01

□ **ST743E**
Drake tank and cover only. Complete with tank trim and coupling components.

□ **ST743ER**
Drake tank and cover only. Complete with tank trim and coupling components. Right hand trip lever.

□ **SS114**
SoftClose®: Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

□ **SC134**
Elongated, open front seat with lid.

□ **SC534**
Elongated, open front seat less lid.

Colors:

Standard #01 Cotton, #11 Colonial White
#12 Sedona Beige, #03 Bone
#51 Ebony

Trip Lever:

Standard #CP Chrome Plated
Optional See price book for additional finishes

CST744E(G) Eco Drake® Close Coupled Toilet, 1.28 GPF

■ PERFORMANCE

The TOTO® E-Max® low consumption toilets received high ratings during ANSI/ASME and CSA testing at independent laboratories. Designed with a powerful siphon jet flushing action, the toilet offers a large water surface and a glazed trapway.

■ SPECIFICATIONS

Water Use: 1.28 Gpf / 4.8 Lpf
 Flush System: Gravity Feed (E-Max® Technology)
 Min. Water Pressure: 8 psi
 Water Surface: 10-1/4" x 8-1/2"
 Trap Diameter: 2-1/8"
 Rough-in: 12" rough-in
 Trap Seal: 2-1/2"
 Acoustic Reading: 65-70dB (may vary depending on room construction)
 Warranty: One Year Limited Warranty
 Material: Vitreous china

Shipping Weight: **C744E(G)** 52 lbs.
ST743E 35 lbs.


Shipping Dimensions: **C744E(G)** 27-3/4"L x 15"W¹
 x 11-3/8"W² x 15-1/8"H

ST743E 20-1/8"L x 8-1/4"W
 x 15-1/2"H

Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2 and CAN/CSA B 45 requirements.

Listing and approval: IAPMO/c-UPC, CSA, City of Los Angeles, State of MA, and others

These dimensions and specifications are subject to change without notice.

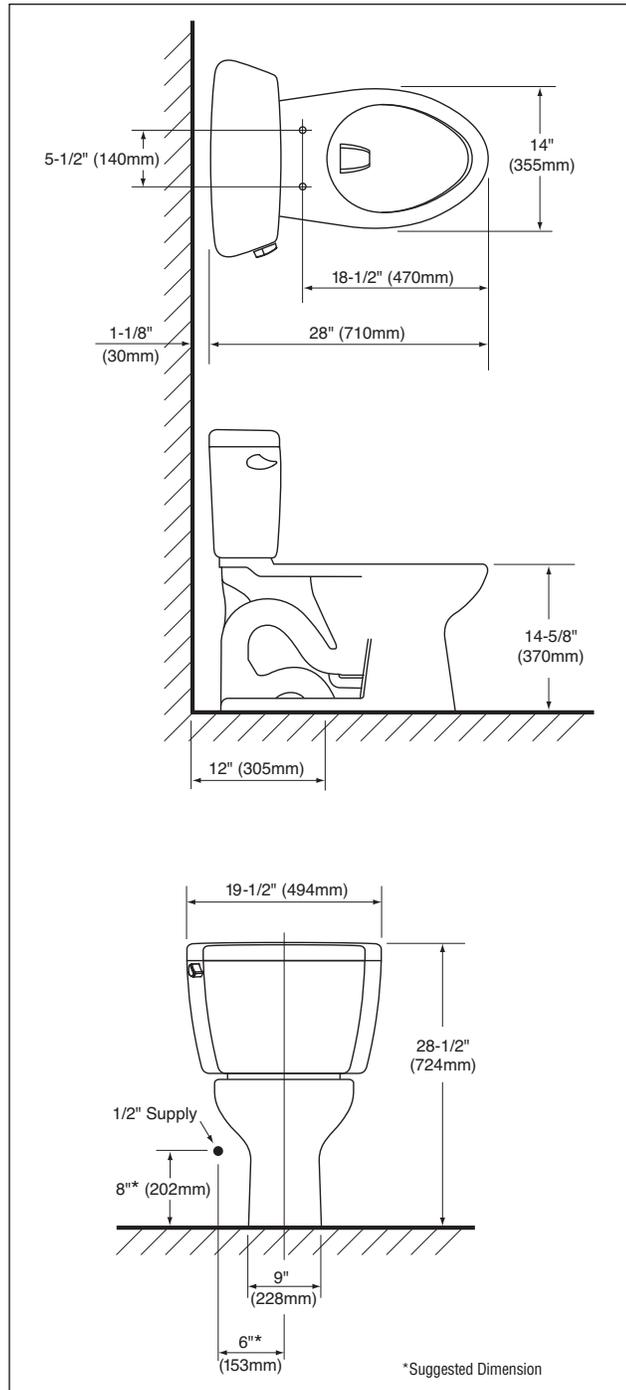

CST744E(G) - Eco Drake® Close Coupled Toilet

TOTO®

TOTO U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260
 Tel. (888) 295-8134 • Fax. (800) 699-4889 • www.totousa.com
 Printed in U.S.A. © TOTO LTD. 03/07 #A10350

Printed on recycled paper ♻️

REV 02/09