

access

L I G H T I N G

INSTALLATION INSTRUCTIONS

IMPORTANT

Before assembling your access lighting fixture, please make sure that you carefully read through these instruction sheets. Consider having your fixture installed by a qualified licensed electrician.


NOTE: The important safeguards and instructions that appear in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care, are factors that can't be built into any product. These factors must be supplied by the person(s) caring for and operating the fixture.

GENERAL INFORMATION

All electrical connections must be in accordance with all ordinances, Local and National Electrical Codes. These fixtures are intended for mounting to a standard 4" x 2 1/2" metal octagon outlet box. The box must be directly supported by the building structure and U.L. Recognized.

STEP BY STEP INSTRUCTIONS

Before starting your installation disconnect the Power by turning off the Circuit Breaker or by removing the fuse at the fuse box. Just turning the light off at the light switch is not sufficient to prevent electrical shock.

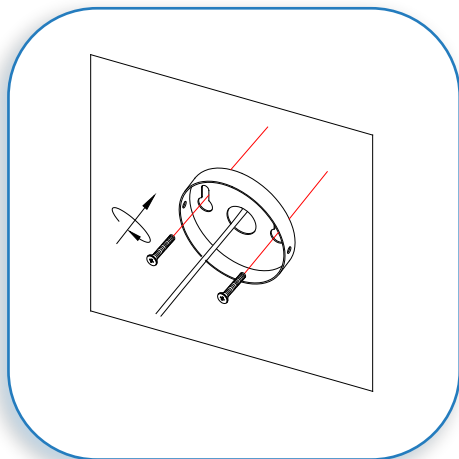

COLLECTION

Cyprus2

APPLICATION

Wall Fixture

MODEL NO.

70018LED

WHAT WE PROVIDE

- Mounting Hardware
- Back plate
- 1 x 3W LED


WHAT YOU NEED

- Screwdriver
- Wire Cutters
- Wiring Supplies as Specified by Electrical Code

1

PREPARE FIXTURE

If there is an existing fixture remove it. Mount the back plate to the headboard with the supplied screws.

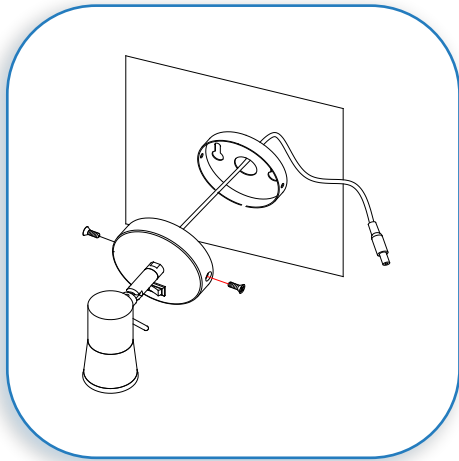


2

MOUNT THE FIXTURE

Fit the fixture canopy to the back plate.

Align the holes in the sides of the back plate with the designated holes in the canopy. Secure with the supplied screws.

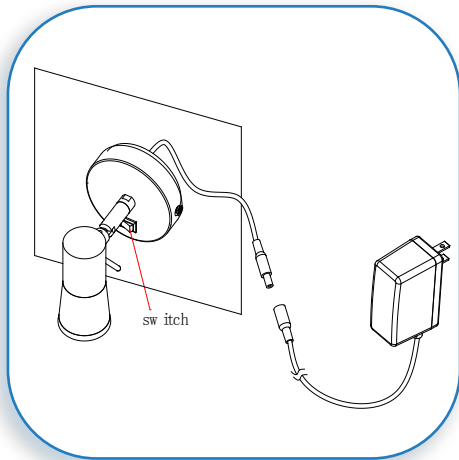

3

SWITCH ON THE FIXTURE

Connect the power supply to the wire from the fixture, then switch on the button.