




24 in. fixture shown in Black with Black receptacles
APT24-4B-P-BK

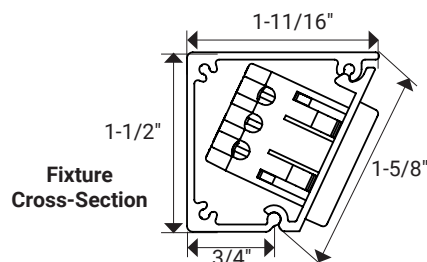

SINGLE RECEPTACLE ANGLE POWER STRIP

| PART NUMBER | DESCRIPTION | LENGTH | NUMBER OF RECEPTACLES | RECEPTACLE COLOR | FINISH OPTION |
|---------------------------------|---|--------|-----------------------|------------------|----------------|
| APT9-2Color-P-Finish-*Position | 9" APT Series Angle Power Strip with 1 Single Receptacle. | 9" | 2 | B, G, W | BK, BZ, SN, WT |
| APT12-2Color-P-Finish-*Position | 12" APT Series Angle Power Strip with 2 Single Receptacle. | 12" | 2 | B, G, W | BK, BZ, SN, WT |
| APT18-3Color-P-Finish-*Position | 18" APT Series Angle Power Strip with 3 Single Receptacles. | 18" | 3 | B, G, W | BK, BZ, SN, WT |
| APT24-4Color-P-Finish | 24" APT Series Angle Power Strip with 4 Single Receptacles. | 24" | 4 | B, G, W | BK, BZ, SN, WT |
| APT30-4Color-P-Finish | 30" APT Series Angle Power Strip with 4 Single Receptacles. | 30" | 4 | B, G, W | BK, BZ, SN, WT |
| APT36-4Color-P-Finish | 36" APT Series Angle Power Strip with 4 Single Receptacles. | 36" | 4 | B, G, W | BK, BZ, SN, WT |
| APT42-5Color-P-Finish | 42" APT Series Angle Power Strip with 5 Single Receptacles. | 42" | 5 | B, G, W | BK, BZ, SN, WT |
| APT48-5Color-P-Finish | 48" APT Series Angle Power Strip with 5 Single Receptacles. | 48" | 5 | B, G, W | BK, BZ, SN, WT |
| APT60-7Color-P-Finish | 60" APT Series Angle Power Strip with 7 Single Receptacles. | 60" | 7 | B, G, W | BK, BZ, SN, WT |
| APT72-8Color-P-Finish | 72" APT Series Angle Power Strip with 8 Single Receptacles. | 72" | 8 | B, G, W | BK, BZ, SN, WT |

Custom lengths and device placements available. Contact Design Services at 866-848-9094.

*Position indicates Left (L) or Right (R) side wire entry

Blue indicates customer choice. Color indicates receptacle color. Finish indicates fixture finish color.

FEATURES

- Slim profile – 1-1/2"
- 120 volt fixture
- 15 amp tamper-resistant single receptacles
- 5-year limited warranty
- Custom options include: adding rocker switch(es), additional receptacles, custom receptacle/switch placement, custom lengths.
- Designed for indoor application
- Simple to install with wood screws and wall anchors (included with fixture)









TECHNICAL INFORMATION

| | |
|-----------------------|---|
| Series | APT Series |
| Input Voltage | 120 volt |
| Amps | 15 amp |
| Rating | cULus Listed |
| Mounting | Wood Screws and Wall Anchors (included) |
| Wiring | 12 gauge Romex for receptacles |
| Environment | Dry locations |
| Construction Material | Powder coated aluminum |

APPLICATIONS

- Kitchens
- Bathrooms
- Offices and computer labs
- Islands
- Shops and garages

RECEPTACLE COLOR & FINISH OPTIONS

| | | | | |
|-------------------|---|--|---|---|
| Receptacle Colors |  |  |  |  |
| | Black (B) | Black (B) | Grey (G) | White (W) |
| Finish Options |  |  |  |  |
| | Black (BK) | Bronze (BZ) | Satin Nickel (SN) | White (WT) |

CUSTOM OPTIONS


APS-Switch-Color Rocker Switch. Available in Black (B), Grey (G), or White (W)

APT-R-Color-15A Tamper-resistant receptacle. Available in Black (B), Grey (G), or White (W)


OPTIONAL INSTALLATION COMPONENTS

| PART NUMBER | DIMENSIONS | DESCRIPTION |
|--------------------|------------------|--|
| APS-BLANK-P-Finish | Varies by order. | APT Series blank filler. Order per linear foot. Available in Black (BK), Bronze (BZ), Satin Nickel (SN), and White (WT). |


72" Fixture – APT72-8Color-P-Finish




60" Fixture – APT60-7Color-P-Finish




48" Fixture – APT48-5Color-P-Finish




42" Fixture – APT42-5Color-P-Finish




36" Fixture – APT36-4Color-P-Finish




30" Fixture – APT30-4Color-P-Finish




24" Fixture – APT24-4Color-P-Finish




LEGEND

 = 15 amp receptacle available in Black (B), Grey (G), or White (W)


 = Knock-out (all knock-outs are located on the back side of fixture and are 1-1/2" from the end)

LEFT SIDE WIRE ENTRY


**18" Fixture
APT18-3Color-P-Finish-L**



**12" Fixture
APT12-2Color-P-Finish-L**




**9" Fixture
APT9-2Color-P-Finish-L**




RIGHT SIDE WIRE ENTRY


**18" Fixture
APT18-3Color-P-Finish-R**



**12" Fixture
APT12-2Color-P-Finish-R**



**9" Fixture
APT9-2Color-P-Finish-R**



CUSTOM OPTIONS/DETAILS

- Custom lengths from 6" – 92" (larger sizes will have a seam when assembled)
- 120 volt integral switch (available in Black, Grey, or White)
- Additional receptacles
- Custom receptacle/switch placement
- Receptacles must be a minimum of 1-1/2" apart (on center)
- Receptacles must be a minimum of 1" from the end. (Requires wire entry at opposite end of fixture) **Knockout cannot be behind device.**
- Custom charges may apply – Call Design Services at 866-848-9094 for a quote, lead time, and assistance with your custom order