
# Slim Profile APT Series







power



# DUPLEX RECEPTACLE ANGLE POWER STRIP

PART NUMBER	DESCRIPTION	LENGTH	NUMBER OF RECEPTACLES	RECEPTACLE COLOR	FINISH OPTION
APT9-2Color-P-Finish-*Position	9" APT Series Angle Power Strip with 1 Single Receptacle.	9"	1	B, G, W	BK, BZ, SN, WT
APT12-2Color-P-Finish-*Position	12" APT Series Angle Power Strip with 2 Single Receptacle.	<sup>1</sup> 12"	2	B, G, W	BK, BZ, SN, WT
APT18-3Color-P-Finish-*Position	18" APT Series Angle Power Strip with 3 Single Receptacles.	<sup>1</sup> 18"	3	B, G, W	BK, BZ, SN, WT
APT24-4Color-P-Finish	24" APT Series Angle Power Strip with 4 Single Receptacles.	<sup>1</sup> 24"	4	B, G, W	BK, BZ, SN, WT
APT30-4Color-P-Finish	30" APT Series Angle Power Strip with 4 Single Receptacles.	30"	4	B, G, W	BK, BZ, SN, WT
APT36-4Color-P-Finish	36" APT Series Angle Power Strip with 4 Single Receptacles.	<sup>1</sup> 36"	4	B, G, W	BK, BZ, SN, WT
APT42-5Color-P-Finish	42" APT Series Angle Power Strip with 5 Single Receptacles.	42"	5	B, G, W	BK, BZ, SN, WT
APT48-5Color-P-Finish	48" APT Series Angle Power Strip with 5 Single Receptacles.	48"	5	B, G, W	BK, BZ, SN, WT
APT60-7Color-P-Finish	60" APT Series Angle Power Strip with 7 Single Receptacles.	<sup>1</sup> 60"	7	B, G, W	BK, BZ, SN, WT
APT72-8Color-P-Finish	72" APT Series Angle Power Strip with 8 Single Receptacles.	<sup>1</sup> 72"	8	B, G, W	BK, BZ, SN, WT

Custom lengths and device placements available. Contact Design Services at 866-848-9094. \*Position indicates Left (L) or Right (R) side wire entry

Blue indicates customer choice. Color indicates receptacle color. Finish indicates fixture finish color.

### FEATURES

- Slim profile 1-1/2"
- · 120 volt fixture
- · 15 amp tamper-resistant single receptacles
- · 5-year limited warranty
- · Custom options include: adding rocker switch(es), additional receptacles, custom receptacle/switch placement, custom lengths.
- · Designed for indoor application
- · Simple to install with wood screws and wall anchors (included with fixture)

### **TECHNICAL INFORMATION**

Series	APT Series		
Input Voltage	120 volt		
Amps	15 amp		
Rating	cULus Listed		
Mounting	Wood Screws and Wall Anchors (included)		
Wiring	12 gauge Romex for receptacles		
Environment	Dry locations		
Construction Material	Powder coated aluminum		

**APPLICATIONS** 

Kitchens

Bathrooms

- · Islands
  - · Shops and garages
- · Offices and computer labs

### **RECEPTACLE COLOR & FINISH OPTIONS**



#### **CUSTOM OPTIONS**

APS-Switch-Color

- APT-R-Color-15A
- White (W)

Tamper-resistant receptacle. Available in Black (B), Grey (G), or

Rocker Switch. Available in Black (B), Grey (G), or White (W)

### **OPTIONAL INSTALLATION COMPONENTS**

DIMENSIONS DESCRIPTION PART NUMBER

**APS-BLANK-P-Finish** Varies by order.


APT Series blank filler. Order per linear foot. Available in Black (BK), Bronze (BZ), Satin Nickel (SN), and White (WT).



Slim Profile APT Series Receptacle Placement (Under Cabinet Installed View)



#### 72" Fixture - APT72-8Color-P-Finish

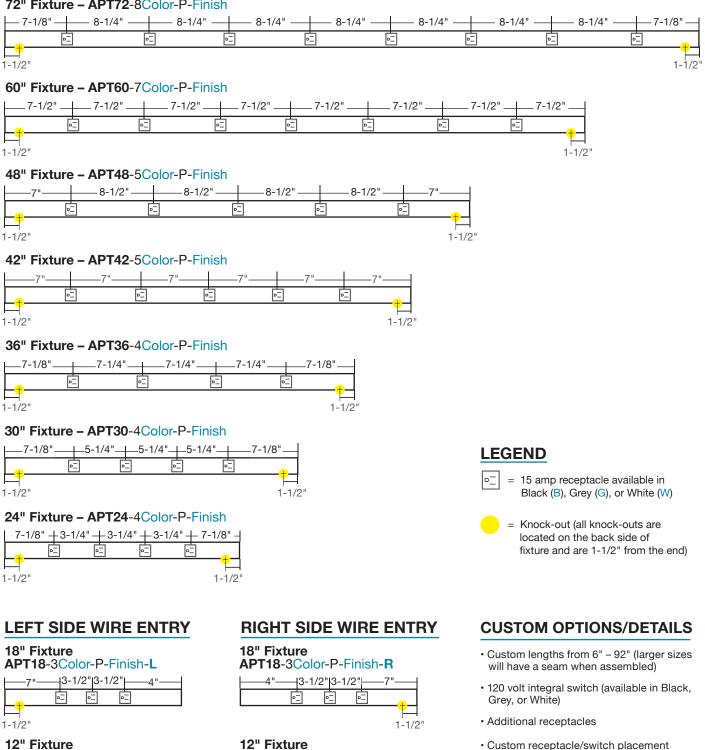

APT12-2Color-P-Finish-L

	2-1	/2'	2-1	/2"
/				
	Þ_	Þ.	-	
		_		

1-1/2"

#### 9" Fixture APT9-2Color-P-Finish-L -2"-2' P.

# APT12-2Color-P-Finish-R

/2"2-1	1/2"	7"	
P_	P_		
			- <u>+</u>
			1-1/2"

1-1/2"

9" Fixture APT9-2Color-P-Finish-R



2

- · Custom receptacle/switch placement
- · Receptacles must be a minimum of 1-1/2" apart (on center)
- · Receptacles must be a minimum of 1" from the end. (Requires wire entry at opposite end of fixture) Knockout cannot be behind device.
- Custom charges may apply Call Design Services at 866-848-9094 for a quote, lead time, and assistance with your custom order